



TUBLAR CLEAR



TUBLAR CLEAR LED DECO POLE 1 X 30W
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM DIA X 2650MM
 GLASS DIA : 140MM DIA X 600MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR,
 5MTR ,6MTR

TUBLAR MILKY



TUBLAR MILKY LED DECO POLE 1 X 30W
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM DIA X 2650MM
 GLASS DIA : 140MM DIA X 600MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR,
 5MTR ,6MTR

4 CORNERED




4CORNER LED DECO POLE 1 X 30W
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 120MM X 120MM X 600MM
 TOP DIA : 120MM X 120MM X 400MM
 4 LEGS : 25MM X 25MM X 2000MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

TRIOLOGICAL




TRIOLOGICAL LED DECO POLE 1 X 30W
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM X 100MM X 2650MM
 FIXTURE SIZE : 200MM X 100MM X 300MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

SQUAD



SQUAD LED DECO POLE 1 X 30W
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM X 100MM X 2650MM
 FIXTURE SIZE : 300MM X 100MM X 300MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

UNO



UNO LED DECO POLE 1 X 60W
 WATTAGE: 1 X 60W /5200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM X 100MM X 2650MM
 FIXTURE SIZE : 450MM X 80MM X 600MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR



BOXER

BOXER LED DECO POLE 2 X 30W
 WATTAGE: 2 X 30W /5400 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM SQ X 3000MM
 FIXTURE SIZE : 600MM X 600MM X 50
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200MM X 200MM X 8MM
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

MONK

MONK - 1 LED DECO POLE 1 X 30W
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION


BOTTOM DIA : 100MM SQ X 3000MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200MM X 200MM X 8MM
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

L-TYPE 1

L-TYPE 1 LED DECO POLE 1 X 30W
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION


BOTTOM DIA : 100MM X 50MM X 3000MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

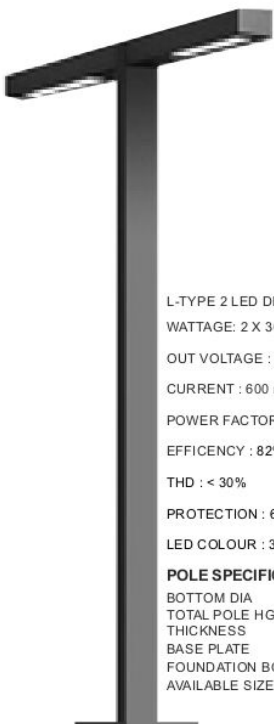L-TYPE 2

L-TYPE 2 LED DECO POLE 2 X 30W
 WATTAGE: 2 X 30W /5400 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM X 50MM X 3000MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

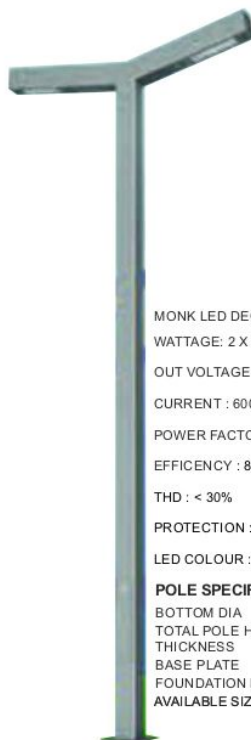MONK - 2 POLE

MONK LED DECO POLE 2 X 30W
 WATTAGE: 2 X 30W /5400 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM X 100MM X 3000MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

L-ANGULAR - 2


L-ANGULAR - 2 LED DECO POLE 2 X 30W
 WATTAGE: 2 X 30W /5400 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM X 100MM X 3000MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR



ANGULAR - 1

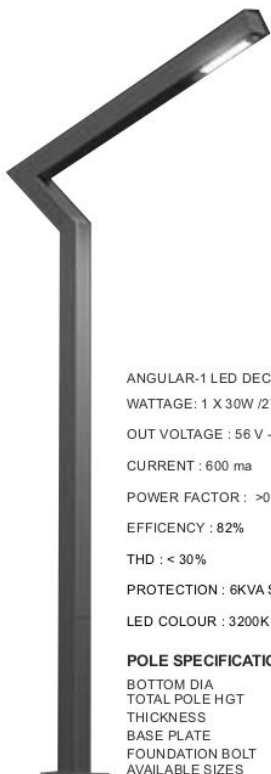

ANGULAR-1 LED DECO POLE 1 X 30W
 WATTAGE: 1 X 30W / 2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM X 100MM X 3000MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

ANGULAR - 2




ANGULAR -2 LED DECO POLE 2 X 30W
 WATTAGE: 2 X 30W / 5400 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM X 100MM X 3000MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

CIRCULAR LED POLE

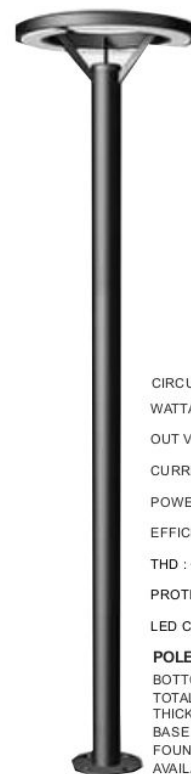

CIRCULAR LED DECO POLE 1 X 40W
 WATTAGE: 1 X 40W / 3200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 90MM DIA X 3000MM
 TOTAL POLE HGT : 3600MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

6



U - TYPE




U - TYPE LED DECO POLE 1 X 30W
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM DIA X 600MM
 TOTAL POLE HGT : 3000MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

V - TYPE

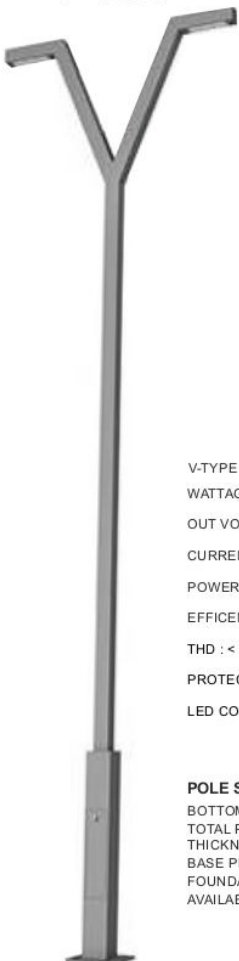

V-TYPE LED DECO POLE 2 X 30W
 WATTAGE: 2 X 30W /5400 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 90MM DIA X 3000MM
 TOTAL POLE HGT : 3600MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR



HACK - 1




FIXTURE SIZE : 100MM X 50MM X 600MM
 POLE SUITABLE : 75MM SQ PIPE
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 WATTAGE AVAILABLE : 2 X 30W , 3 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

COCK - 1



FIXTURE SIZE : 100MM X 50MM X 800MM
 POLE SUITABLE : 75MM SQ PIPE
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 WATTAGE AVAILABLE : 2 X 30W , 3 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

TAPERED - 1




FIXTURE SIZE : 250MM X 100MM X 600MM
 POLE SUITABLE : 100MM SQ PIPE
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 2 X 30W
 WATTAGE AVAILABLE : 4 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

HACK - 2



FIXTURE SIZE : 100MM X 50MM X 1200MM
 POLE SUITABLE : 75MM SQ PIPE
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 2 X 30W
 WATTAGE AVAILABLE : 4 X 30W , 6 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

COCK - 2

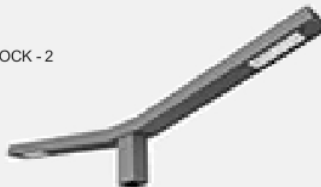

FIXTURE SIZE : 100MM X 50MM X 1200MM
 POLE SUITABLE : 75MM SQ PIPE
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 2 X 30W
 WATTAGE AVAILABLE : 4 X 30W , 6 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

TAPERED - 2




FIXTURE SIZE : 250MM X 100MM X 1200MM
 POLE SUITABLE : 100MM SQ PIPE
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 4 X 30W
 WATTAGE AVAILABLE : 8 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

MONK WALLBRACKET



FIXTURE SIZE : 600MM X 100MM X 600MM
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

ANGULAR- 1 WALLBRACKET

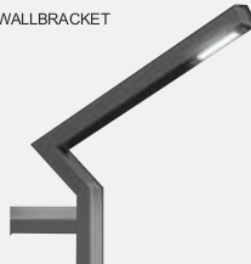

FIXTURE SIZE : 600MM X 100MM X 600MM
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

BOXER WALLBRACKET



FIXTURE SIZE : 600MM X 300MM X 600MM
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 2 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

SINGLE STRIAIGHT POLE TOP LIGHT 1 X 30 WATT



FIXTURE SIZE : 600MM X 100MM X 100MM
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

TRIKO POLE TOP LIGHT 1 X 30W



FIXTURE SIZE : 600MM X 100MM X 600MM
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

SCUBO POLE TOP LIGHT 1 X 30W




FIXTURE SIZE : 600MM X 100MM X 600MM
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

8 DECORATIVE POLES





Olive

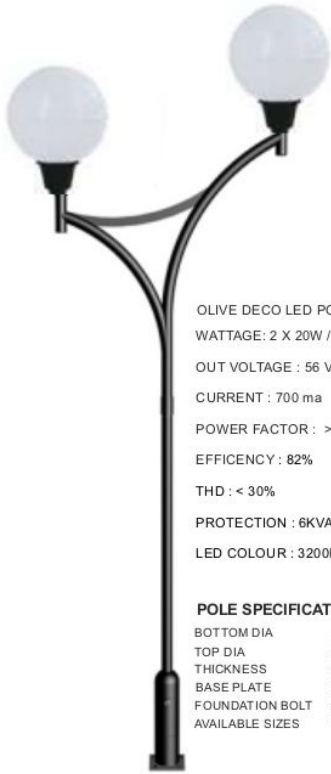


OLIVE DECO LED POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200MM X 200MM X 8MM
 FOUNDATION BOLT : 16MM X 300MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

Opto




OPTO LED POLE 1 x 30W
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200MM X 200MM X 8MM
 FOUNDATION BOLT : 16MM X 300MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

Supra

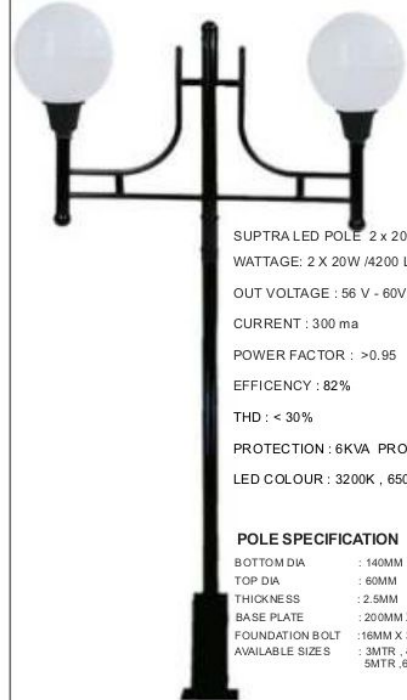


SUPTRA LED POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200MM X 200MM X 8MM
 FOUNDATION BOLT : 16MM X 300MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

OCTRA - 1

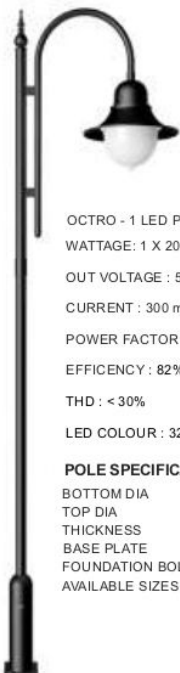


OCTRO - 1 LED POLE 1 x 20w
 WATTAGE: 1 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200MM X 200MM X 8MM
 FOUNDATION BOLT : 16MM X 300MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

OCTRA - 2

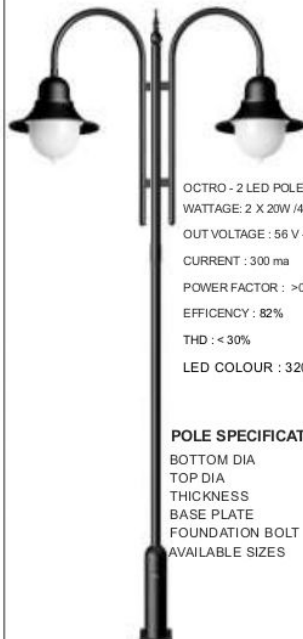


OCTRO - 2 LED POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200MM X 200MM X 8MM
 FOUNDATION BOLT : 16MM X 300MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

CELO



CELO LED POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200MM X 200MM X 8MM
 FOUNDATION BOLT : 16MM X 300MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR, 5MTR ,6MTR

COSMO




COSMO DECO LED POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR

SUMNO

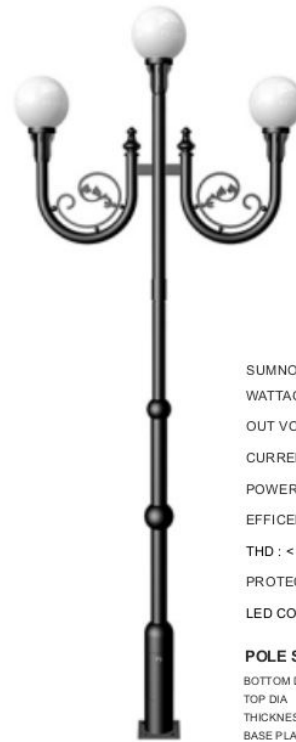

SUMNO LED POLE 3 x 15w
 WATTAGE: 3 X 15W / 4500 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA SURGE PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR

PUTRA - 1



PUTRA - 1 LED POLE 1 x 20w
 WATTAGE: 1 X 20W /2100 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR

PUTRA - 2




PUTRA - 2 LED POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR

WIO

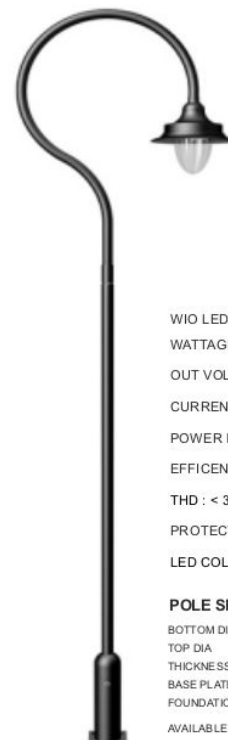

WIO LED POLE 1 x 30w
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR



VAYU - 2

VAYU - 1



VAYU-2 DECO LED POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

VAYU-1 DECO LED POLE 1 x 20w
 WATTAGE: 1 X 20W /2100 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

INDRA - 2

INDRA - 1



INDRA-2 DECO LED POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR


INDRA-1 DECO LED POLE 1 x 20w
 WATTAGE: 1 X 20W /2100 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

MOON - 1

MOON - 2

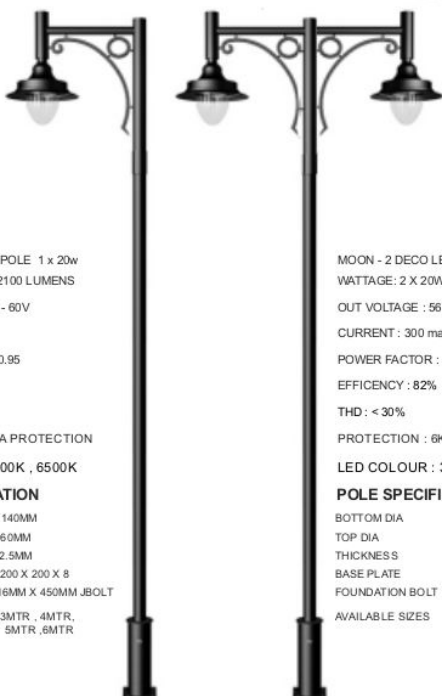

MOON-1 DECO LED POLE 1 x 20w
 WATTAGE: 1 X 20W /2100 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR


MOON-2 DECO LED POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

SPHERA - 2

SPHERA - 1

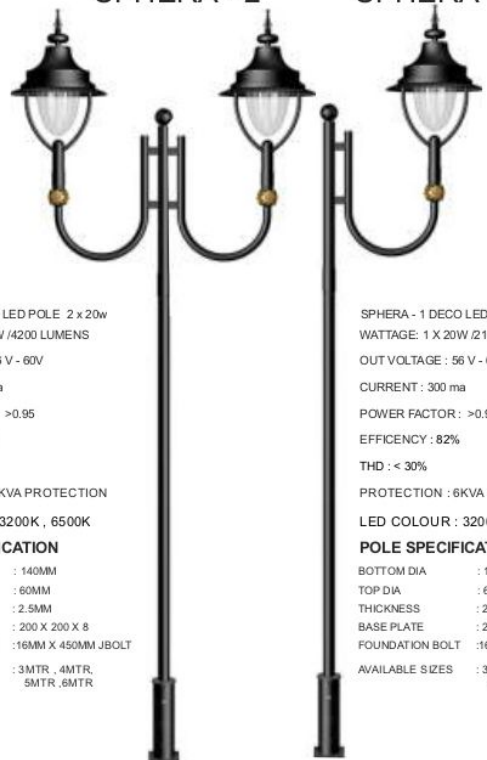

SPHERA-2 DECO LED POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

SPHERA-1 DECO LED POLE 1 x 20w
 WATTAGE: 1 X 20W /2100 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR




ARCHITECTURAL POLES





UPLOAD -1

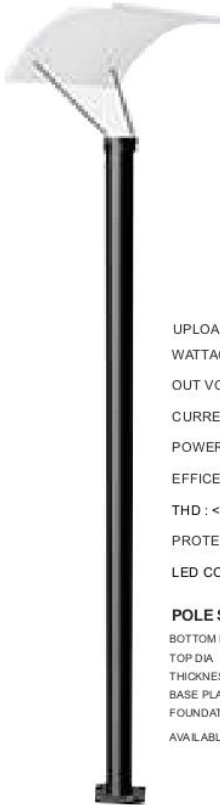


UPLOAD -1 DECO LED POLE 1 x 30w
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 90MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR,
 5MTR ,6MTR

FLY-1

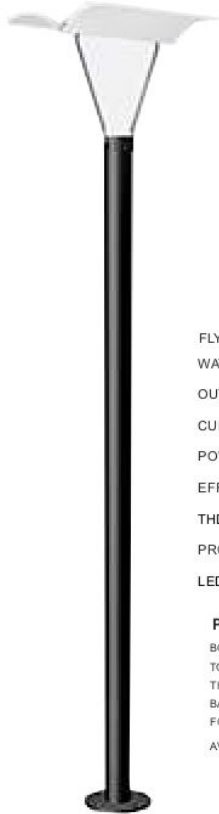

FLY-1 DECO LED POLE 1 x 30w
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 90MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR,
 5MTR ,6MTR

GIRAFFE




GIRAFFE DECO LED POLE 1 x 30w
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR,
 5MTR ,6MTR

SNAKE

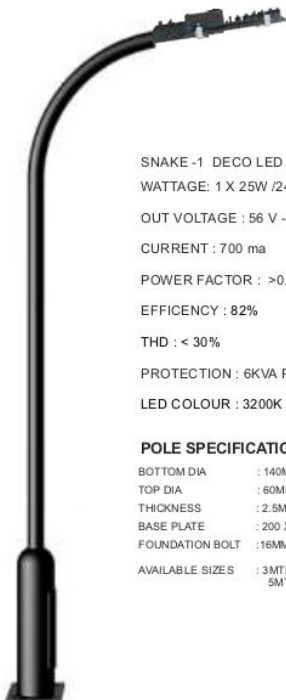

SNAKE -1 DECO LED POLE 1 x 25w
 WATTAGE: 1 X 25W /2400 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR,
 5MTR ,6MTR

SUPERB




SUPERB DECO LED POLE 1 x 30w
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM X 50MM X 3000MM
 TOP DIA : 100MM X 50MM X 300MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 400 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR,
 5MTR ,6MTR

DOWNDOOM

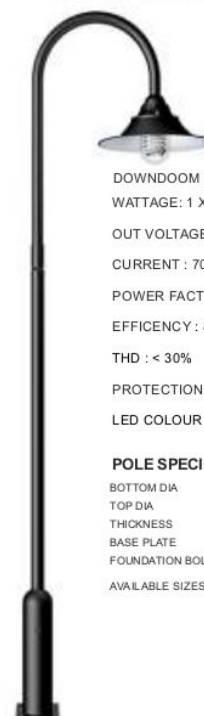


DOWNDOOM DECO LED POLE 1 x 30w
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION


BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR,
 5MTR ,6MTR

ROLLER

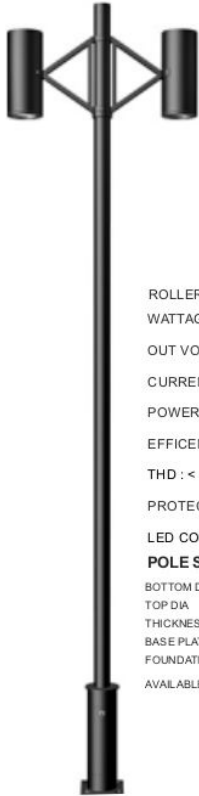


ROLLER - 2 DECO LED POLE 2 x 30w
 WATTAGE: 2 X 30W / 5400 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 600 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K
POLE SPECIFICATION
 BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR

TOSCANO

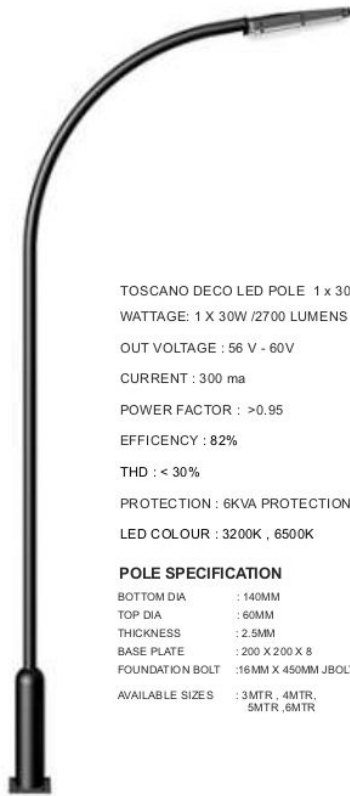

TOSCANO DECO LED POLE 1 x 30w
 WATTAGE: 1 X 30W / 2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K
POLE SPECIFICATION
 BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR

SPIRAL

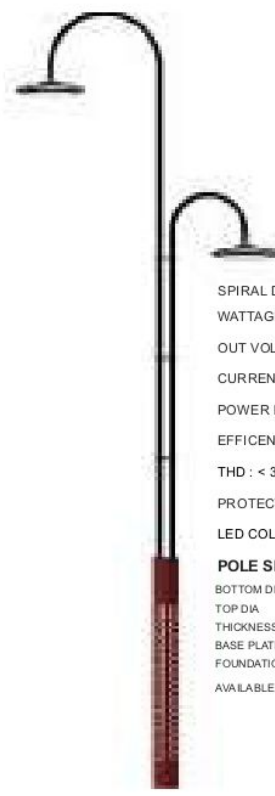

SPIRAL DECO LED POLE 2 x 30w
 WATTAGE: 2 X 30W / 5400 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K
POLE SPECIFICATION
 BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR

TANGLE



TANGLE DECO LED POLE 2 x 30w
 WATTAGE: 2 X 30W / 5400 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K
POLE SPECIFICATION
 BOTTOM DIA : 100MM SQAURE
 TOP PIPE : 40MM SQAURE
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR

HEXAGON



HEXAGON DECO LED POLE 2 x 30w
 WATTAGE: 2 X 30W / 5400 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K
POLE SPECIFICATION
 BOTTOM DIA : 100MM
 TOP PIPE : 30MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR


TYRE



TYRE DECO LED POLE 2 x 30w
 WATTAGE: 2 X 30W / 5400 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K
POLE SPECIFICATION
 BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR



TRIO POLE

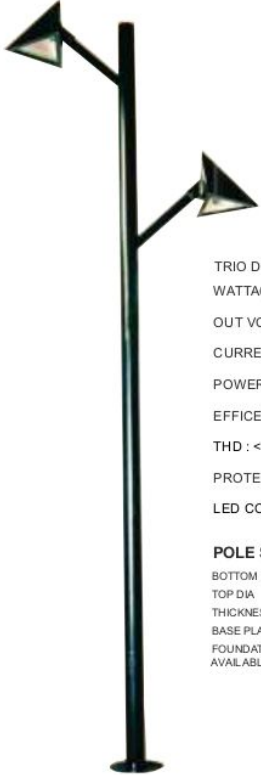

TRIO DECO LED POLE 2 x 30w
WATTAGE: 2 X 30W /5400 LUMENS
OUT VOLTAGE : 56 V - 60V
CURRENT : 700 ma
POWER FACTOR : >0.95
EFFICIENCY : 82%
THD : < 30%
PROTECTION : 6KVA PROTECTION
LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM
TOP DIA : 60MM
THICKNESS : 2.5MM
BASE PLATE : 200 X 200 X 8
FOUNDATION BOLT : 16MM X 450MM JBOLT
AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

BAYWATCH



BAY WATCH DECO LED POLE 1 x 30w
WATTAGE: 1 X 30W /2700 LUMENS
OUT VOLTAGE : 56 V - 60V
CURRENT : 700 ma
POWER FACTOR : >0.95
EFFICIENCY : 82%
THD : < 30%
PROTECTION : 6KVA PROTECTION
LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM
TOP DIA : 60MM
THICKNESS : 2.5MM
BASE PLATE : 200 X 200 X 8
FOUNDATION BOLT : 16MM X 450MM JBOLT
AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

RETRO




RETRO DECO LED POLE 2 x 30w
WATTAGE: 2 X 30W /5400 LUMENS
OUT VOLTAGE : 56 V - 60V
CURRENT : 700 ma
POWER FACTOR : >0.95
EFFICIENCY : 82%
THD : < 30%
PROTECTION : 6KVA PROTECTION
LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM
TOP DIA : 60MM
THICKNESS : 2.5MM
BASE PLATE : 200 X 200 X 8
FOUNDATION BOLT : 16MM X 450MM JBOLT
AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

TENT POLE

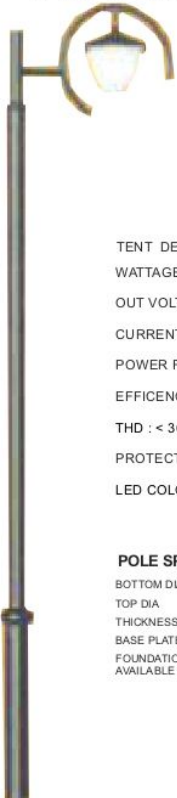

TENT DECO LED POLE 1 x 20w
WATTAGE: 1 X 20W /2100 LUMENS
OUT VOLTAGE : 56 V - 60V
CURRENT : 300 ma
POWER FACTOR : >0.95
EFFICIENCY : 82%
THD : < 30%
PROTECTION : 6KVA PROTECTION
LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
TOP DIA : 60MM
THICKNESS : 2.5MM
BASE PLATE : 200 X 200 X 8
FOUNDATION BOLT : 16MM X 450MM JBOLT
AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

STRAIGHT POLE



POLE SPECIFICATION

BOTTOM DIA : 140MM
TOP DIA : 60MM
THICKNESS : 2.5MM
BASE PLATE : 220 X 220 X 8
FOUNDATION BOLT : 14MM X 450MM JBOLT
AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

LOCK N LOCK



LOCK N LOCK DECO LED POLE 1 x 20w
WATTAGE: 1 X 20W /2100 LUMENS
OUT VOLTAGE : 56 V - 60V
CURRENT : 300 ma
POWER FACTOR : >0.95
EFFICIENCY : 82%
THD : < 30%
PROTECTION : 6KVA PROTECTION
LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
TOP DIA : 60MM
THICKNESS : 2.5MM
BASE PLATE : 220 X 220 X 8
FOUNDATION BOLT : 14MM X 450MM JBOLT
AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

CCTC




TRIO DECO LED POLE 1 x 30w
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

TRIPO

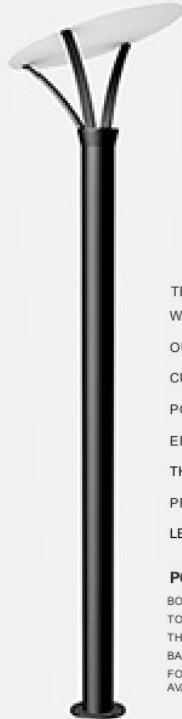

TRIPO DECO LED POLE 1 x 30w
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR


KIRANA



KIRANA LED POLE 1 x 30w
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 900MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

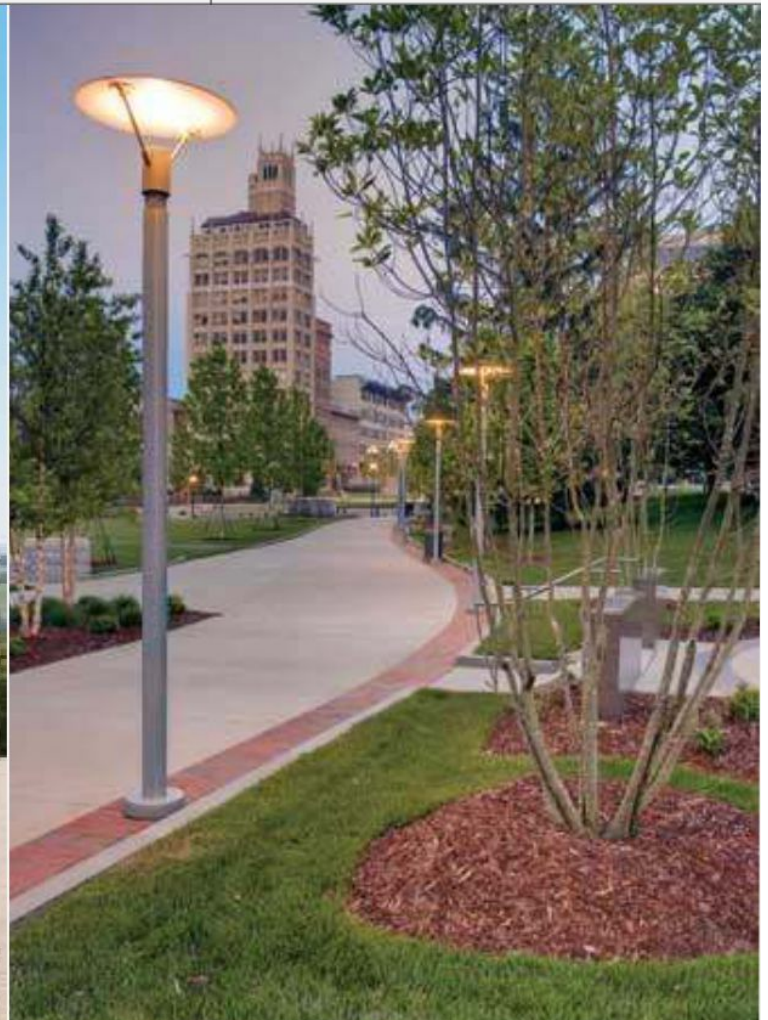



OVO



CTC LED POLE 1 x 30w
 ATTAGE: 1 X 30W /2700 LUMENS
 JT VOLTAGE : 56 V - 60V
 JRRRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 90MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR

SLIDERS



SLIDERS DECO LED POLE 1 x 30w
 WATTAGE: 1 X 30W /2700 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR

METRO



METRO DECO LED POLE 2 x 30w
 WATTAGE: 2 X 30W /5400 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 700 ma
 POWER FACTOR : >0.95
 EFFICENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 100MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR ,
 5MTR , 6MTR



BREZZA - 2




BREZZA -2 LED DECO POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 150MM SQ
 TOP DIA : 40MM SQUARE
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

NORTH POINT

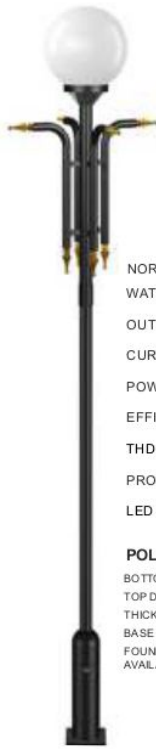

NORTH POINT LED DECO POLE 1 x 20w
 WATTAGE: 1 X 20W /2100 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

VITTARA - 2




VITTARA DECO LED POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

BOMMER -2

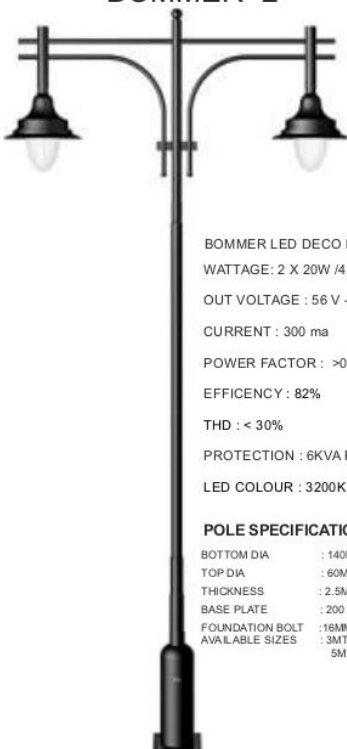


BOMMER LED DECO POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

STYLO - 1

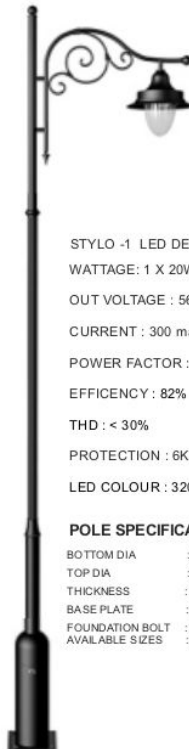


STYLO -1 LED DECO POLE 1 x 20w
 WATTAGE: 1 X 20W /2100 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

STYLO - 2

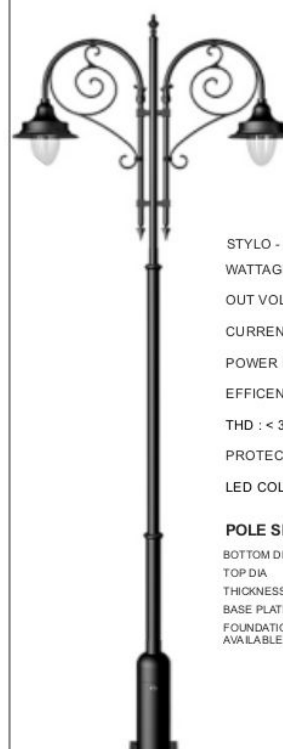

STYLO - 2 LED POLE 2 x 20w
 WATTAGE: 2 X 20W /4200 LUMENS
 OUT VOLTAGE : 56 V - 60V
 CURRENT : 300 ma
 POWER FACTOR : >0.95
 EFFICIENCY : 82%
 THD : < 30%
 PROTECTION : 6KVA PROTECTION
 LED COLOUR : 3200K , 6500K

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR , 6MTR

PARACHUTE



FIXTURE SIZE : 600MM X 600MM X 900MM
 POLE SUITABLE : 90MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

TUBLAR



FIXTURE SIZE : 140MM DIA X 800MM
 POLE SUITABLE : 60MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

CIRCULAR



FIXTURE SIZE : 450MM X 450MM X 350MM
 POLE SUITABLE : 90MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 4 X 10W = 40WATTS
 WATTAGE AVAILABLE : 4 X 15W = 60 WATTS
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

SLEEKO



FIXTURE SIZE : 600MM X 600MM X 350MM
 POLE SUITABLE : 90MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 WATTAGE AVAILABLE : 1 X 40W , 1 X 60W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

LINO



FIXTURE SIZE : 140MM X 140MM X 400MM
 POLE SUITABLE : 76 MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 20W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

MARVEL



FIXTURE SIZE : 600MM X 600MM X 350MM
 POLE SUITABLE : 76MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 4 X 10W = 40 WATTS
 WATTAGE AVAILABLE : 4 X 20W = 80 WATTS
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

HUT



FIXTURE SIZE : 300MM X 300MM X 400MM
 GLASS DIA : 114MM DIA
 POLE SUITABLE : 60MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 20W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

COLAR



FIXTURE SIZE : 600MM X 600MM X 600MM
 GLASS DIA : 140MM DIA GLASS X 600MM
 POLE SUITABLE : 114MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

RIB HAT



FIXTURE SIZE : 300MM X 300MM X 300MM
 GLASS DIA : 90MM DIA X 400MM
 POLE SUITABLE : 90MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 20W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

MUSHROOM



FIXTURE SIZE : 400MM X 400MM X 300MM
 POLE SUITABLE : 76MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

JAGUAR



FIXTURE SIZE : 600MM X 100MM X 600MM
 POLE SUITABLE : 100MM SQ
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

BOXER



FIXTURE SIZE : 600MM X 100MM X 400MM
 POLE SUITABLE : 100MM X 100MM SQ PIPE
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

ROBO -R



FIXTURE SIZE : 300MM X 300MM X 400MM
 POLE SUITABLE : 60MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 20W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

ROBO -S



FIXTURE SIZE : 400MM X 400MM X 500MM
 POLE SUITABLE : 60MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

ROBO -V



FIXTURE SIZE : 300MM X 300MM X 350MM
 POLE SUITABLE : 60MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 20W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

WING - 3



FIXTURE SIZE : 600MM X 600MM X 350MM
 POLE SUITABLE : 90MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

WING - 1



FIXTURE SIZE : 400MM X 300MM X 400MM
 POLE SUITABLE : 90MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 30W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH

SATURN



FIXTURE SIZE : 600MM X 600MM X 300MM
 POLE SUITABLE : 76MM DIA
 THICKNESS : 2.5MM THICKNESS
 LED WATTAGE : 1 X 40W
 DRIVER : 56V - 60V X 600 ma
 POWER FACTOR : >0.95
 LED COLOUR : 3200K , 6500K
 BODY COLOUR : GREY TEXTURE FINISH





MINI HAT



FIXTURE SIZE : 300MM X 300MM X 400MM
THICKNESS : 2.5MM THICKNESS
LED WATTAGE : 1 X 20W
DRIVER : 56V - 60V X 600 ma
POWER FACTOR : >0.95
LED COLOUR : 3200K , 6500K
BODY COLOUR : GREY TEXTURE FINISH

HAT WALL



FIXTURE SIZE : 300MM X 300MM X 600MM
THICKNESS : 2.5MM THICKNESS
LED WATTAGE : 1 X 20W
DRIVER : 56V - 60V X 600 ma
POWER FACTOR : >0.95
LED COLOUR : 3200K , 6500K
BODY COLOUR : GREY TEXTURE FINISH

DOOMED



FIXTURE SIZE : 450MM X 450MM X 350MM
THICKNESS : 2.5MM THICKNESS
LED WATTAGE : 1 X 30W = 30WATTS
DRIVER : 56V - 60V X 600 ma
POWER FACTOR : >0.95
LED COLOUR : 3200K , 6500K
BODY COLOUR : GREY TEXTURE FINISH

SLEEKOWALL



FIXTURE SIZE : 300MM X 300MM X 600MM
THICKNESS : 2.5MM THICKNESS
LED WATTAGE : 1 X 30W
DRIVER : 56V - 60V X 600 ma
POWER FACTOR : >0.95
LED COLOUR : 3200K , 6500K
BODY COLOUR : GREY TEXTURE FINISH

UPLOAD WALL



FIXTURE SIZE : 400MM X 300MM X 600MM
THICKNESS : 2.5MM THICKNESS
LED WATTAGE : 1 X 30W
DRIVER : 56V - 60V X 600 ma
POWER FACTOR : >0.95
LED COLOUR : 3200K , 6500K
BODY COLOUR : GREY TEXTURE FINISH

SLIDER WALL



FIXTURE SIZE : 300MM X 300MM X 600MM
THICKNESS : 2.5MM THICKNESS
LED WATTAGE : 20 WATTS
DRIVER : 56V - 60V X 600 ma
POWER FACTOR : >0.95
LED COLOUR : 3200K , 6500K
BODY COLOUR : GREY TEXTURE FINISH

OPERA



FIXTURE SIZE : 400MM X 400MM X 600MM
THICKNESS : 2.5MM THICKNESS
LED WATTAGE : 1 X 20W
DRIVER : 56V - 60V X 600 ma
POWER FACTOR : >0.95
LED COLOUR : 3200K , 6500K
BODY COLOUR : GREY TEXTURE FINISH

REPI



FIXTURE SIZE : 140MM X 300MM X 300MM
THICKNESS : 2.5MM THICKNESS
LED WATTAGE : 1 X 20W
DRIVER : 56V - 60V X 600 ma
POWER FACTOR : >0.95
LED COLOUR : 3200K , 6500K
BODY COLOUR : GREY TEXTURE FINISH

SAT WALL



FIXTURE SIZE : 600MM X 600MM X 900MM
THICKNESS : 2.5MM THICKNESS
LED WATTAGE : 1 X 40W
DRIVER : 56V - 60V X 600 ma
POWER FACTOR : >0.95
LED COLOUR : 3200K , 6500K
BODY COLOUR : GREY TEXTURE FINISH



22




 LIGHTZART
ENHANCING SPACES

STREET POLES




BALANCER - 2

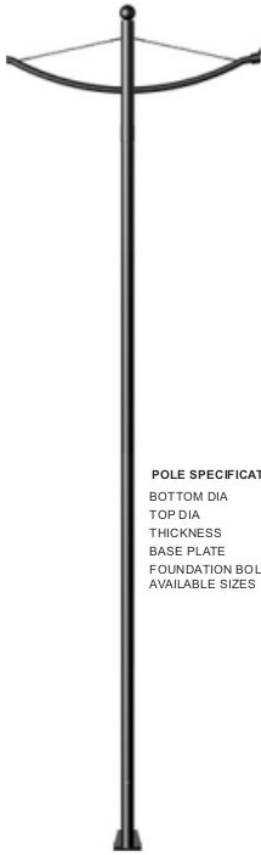

POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

VOLAR - 2

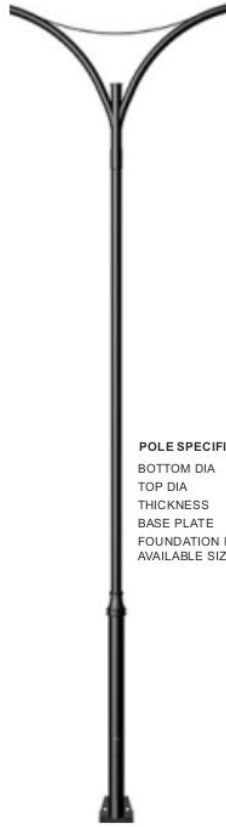


POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

SWAN - 2




POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

SQUARE -2

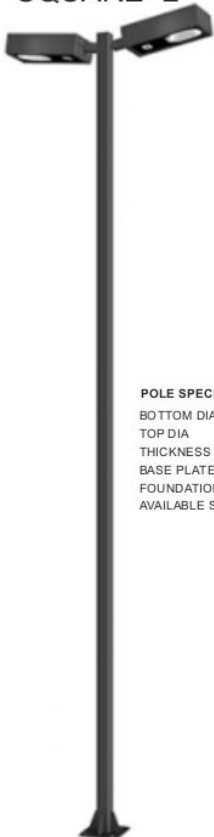


POLE SPECIFICATION
 BOTTOM DIA : 100MM SQUARE
 TOP DIA : 50MM X 50MM SQUARE
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

SIZZLER -2

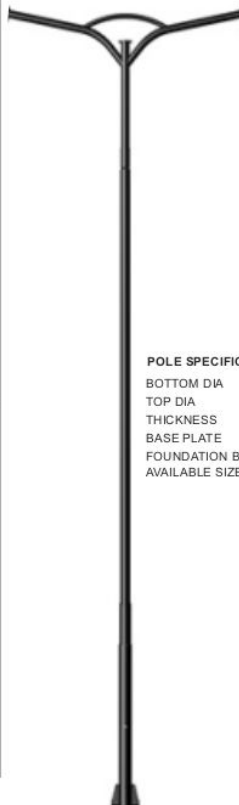

POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

VULTURE - 2

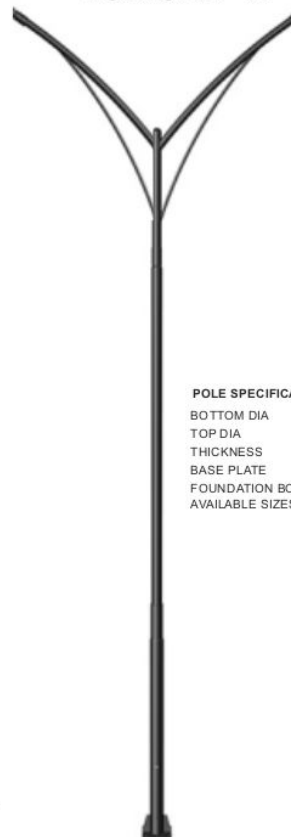

POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

SIM



POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

JIM



POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

RIM



POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

VIM



POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

LEAF




POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

LYF



POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

MANO

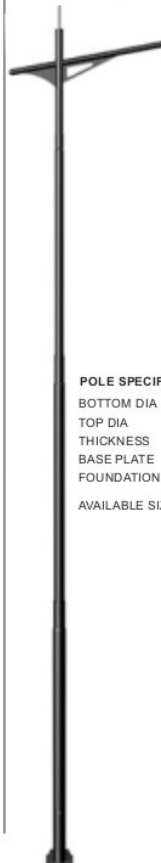


POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

JUNLE




POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

SIRI

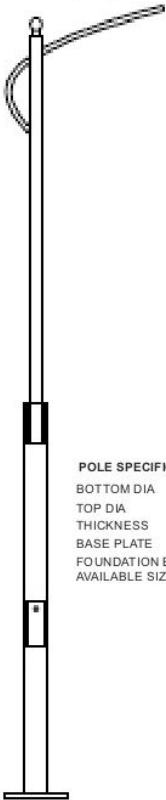

POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

VIVO

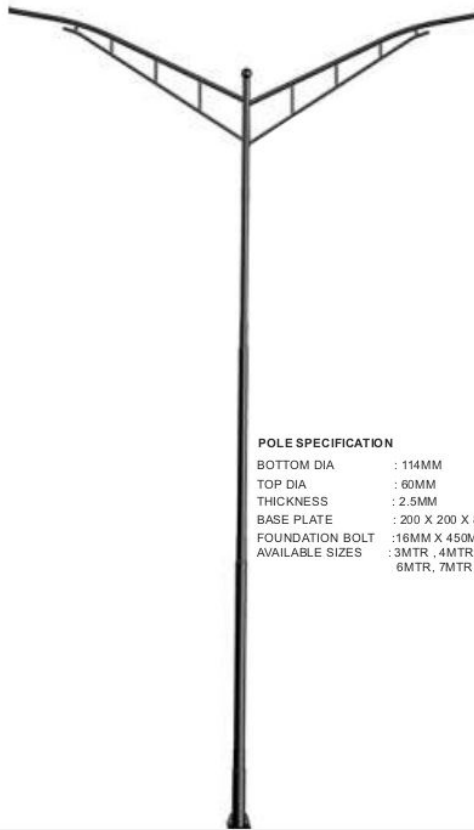

POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

SUNA



POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

PYRA



POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

SYRA



POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

SUTA



POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

SENTA



POLE SPECIFICATION
 BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT
 AVAILABLE SIZES : 3MTR , 4MTR , 5MTR
 6MTR , 7MTR , 8MTR

BUTTERFLY



POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT

AVAILABLE SIZES : 3MTR , 4MTR, 5MTR
 6MTR, 7MTR , 8MTR

S-TYPE




POLE SPECIFICATION

BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT

AVAILABLE SIZES : 3MTR , 4MTR, 5MTR
 6MTR, 7MTR , 8MTR

BLINGO

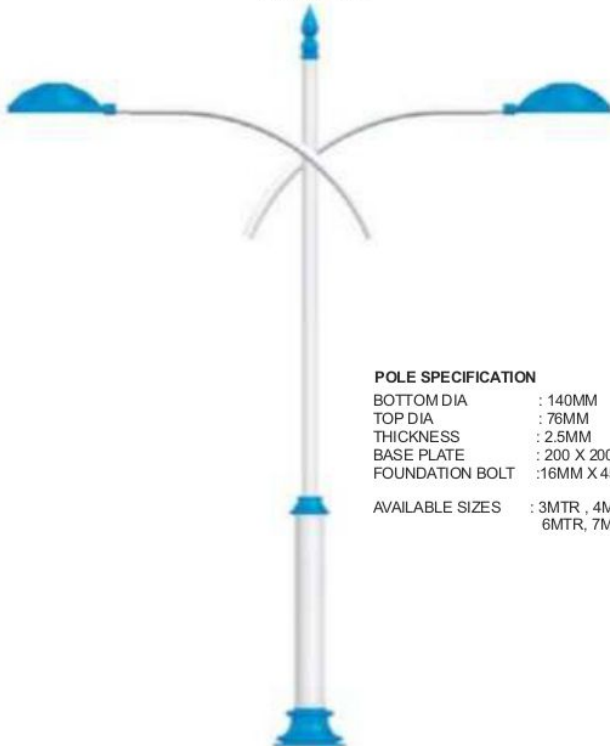

POLE SPECIFICATION

BOTTOM DIA : 140MM
 TOP DIA : 76MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT

AVAILABLE SIZES : 3MTR , 4MTR, 5MTR
 6MTR, 7MTR , 8MTR

HUMMER



POLE SPECIFICATION

BOTTOM DIA : 114MM
 TOP DIA : 60MM
 THICKNESS : 2.5MM
 BASE PLATE : 200 X 200 X 8
 FOUNDATION BOLT : 16MM X 450MM JBOLT

AVAILABLE SIZES : 3MTR , 4MTR, 5MTR
 6MTR, 7MTR , 8MTR

AREA LIGHTING POLES



ALP - 6



POLE SPECIFICATION

BOTTOM DIA : 140MM
TOP DIA : 60MM
THICKNESS : 2.5MM
BASE PLATE : 220 X 220 X 8
FOUNDATION BOLT : 14MM X 450MM JBOLT
AVAILABLE SIZES : 3MTR , 4MTR, 5MTR
6MTR, 7MTR , 8MTR



ALP - 4



POLE SPECIFICATION

BOTTOM DIA : 140MM
TOP DIA : 60MM
THICKNESS : 2.5MM
BASE PLATE : 220 X 220 X 8
FOUNDATION BOLT : 14MM X 450MM JBOLT
AVAILABLE SIZES : 3MTR , 4MTR, 5MTR
6MTR, 7MTR , 8MTR



ALP - 1



POLE SPECIFICATION

BOTTOM DIA : 140MM
TOP DIA : 60MM
THICKNESS : 2.5MM
BASE PLATE : 220 X 220 X 8
FOUNDATION BOLT : 14MM X 450MM JBOLT
AVAILABLE SIZES : 3MTR , 4MTR, 5MTR
6MTR, 7MTR , 8MTR





LIGHTZART
ENHANCING SPACES

NOTES.

A series of horizontal dotted lines for writing notes, spanning the width of the page.